




KwikFlange



KwikFlange is a Haltom Industries exclusive—an economical option for connecting round or oval ducts where slip-fit or angle ring connections do not apply. Imagine a lightweight flange connector that decreases your install time by 50%; connected with standard metal screws to yield solid joints with minimal effort and matched to any size, perfect for spiral and long-seam ductwork.

KwikFlange Connector						
Product Code	Wall	Round and Oval (Major/Minor)	Material Type	Gauge	Tolerance	Classification
KF	SW, DW1, DW2	4"0 - 96"0	Galvanized	18ga Minimum	±1/16"	T25a Connector in accordance with SMACNA, D.C.S.
		4"0 - 96"0	Galvanneal (Paint Grip)	18ga Minimum		
		4"0 - 96"0	304 SS	20ga Minimum		
		24"0 - 96"0	316 SS	20ga Minimum		
		22"0 - 96"0	3003 Aluminum	.050 Minimum		

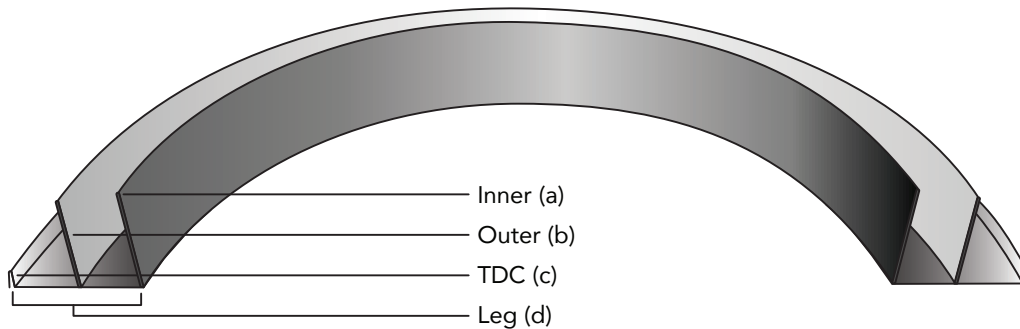

KwikFlange					
Profile	Wall	Inner (a)	Outer (b)	TDC (c)	Leg (d)
Stamped Flange Profile Diameters 20"Ø and below	Single Wall	N/A	1-3/8"	1/4"	1-1/4"
	1" Double Wall (Assembled)	1-7/8"	1-3/8"	1/4"	2-1/4"
	2" Double Wall (Assembled)	1-7/8"	1-3/8"	1/4"	3-1/4"
Rolled Flange Profile Diameters 20"Ø and larger	Single Wall	N/A	1-3/8"	3/8"	1-3/8"
	1" Double Wall (Assembled)	2"	1-3/8"	3/8"	2-1/4"
	2" Double Wall (Assembled)	2"	1-3/8"	3/8"	3-1/4"

